




ハンダ用オープンフレーム

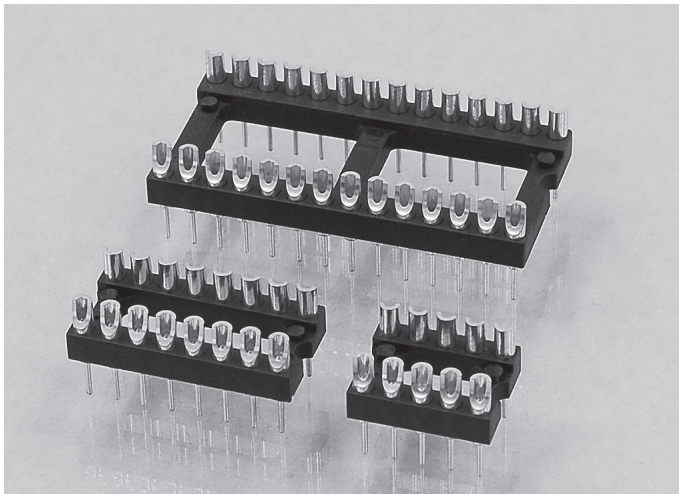

- ソルダカップピンをDIPプラグにかえたプラグでプリント基板に実装も簡単に行え、またアダプタとしても使用でき大変便利です
- ピン径はソルダテイルの $\varnothing 0.53\text{mm}$

仕様 インシュレーター: ガラス封入熱可塑性樹脂ポリエステル、UL94 V-0、黒色、PCT-GF30FR
 コンタクト材質: CuZn36Pb3 (C36000)
 適合ピン径: $\varnothing 0.5\text{mm}$
 機械的寿命: 100回(最低)
 定格電流: 1A
 耐電圧: 1,000Vrms(最低)

寸法 (mm)		1レール 入り数	シリーズ ピン 	R180-10	R180-80
A	B			0.25 μm 金 ピン数	純錫 型番
5.0	7.62	108	4	R180-10-304	R180-80-304
7.6	7.62	71	6	R180-10-306	R180-80-306
10.1	7.62	53	8	R180-10-308	R180-80-308
12.6	7.62	42	10	R180-10-310	R180-80-310
15.2	7.62	—	12	R180-10-312	R180-80-312
17.7	7.62	30	14	R180-10-314	R180-80-314
20.3	7.62	26	16	R180-10-316	R180-80-316
22.8	7.62	23	18	R180-10-318	R180-80-318
25.3	7.62	21	20	R180-10-320	R180-80-320
27.9	7.62	19	22	R180-10-322	R180-80-322
30.4	7.62	17	24	R180-10-324	R180-80-324
35.5	7.62	15	28	R180-10-328	R180-80-328
25.3	10.16	21	20	R180-10-420	R180-80-420
27.9	10.16	19	22	R180-10-422	R180-80-422
30.4	10.16	17	24	R180-10-424	R180-80-424
35.5	10.16	15	28	R180-10-428	R180-80-428
40.6	10.16	13	32	R180-10-432	R180-80-432
12.6	15.24	—	10	R180-10-610	R180-80-610
30.4	15.24	17	24	R180-10-624	R180-80-624
35.5	15.24	15	28	R180-10-628	R180-80-628
40.6	15.24	13	32	R180-10-632	R180-80-632
45.7	15.24	11	36	R180-10-636	R180-80-636
50.6	15.24	10	40	R180-10-640	R180-80-640
53.1	15.24	10	42	R180-10-642	R180-80-642
60.8	15.24	8	48	R180-10-648	R180-80-648
63.4	15.24	8	50	R180-10-650	R180-80-650
65.9	15.24	8	52	R180-10-652	R180-80-652
63.4	22.86	8	50	R180-10-950	R180-80-950
65.9	22.86	8	52	R180-10-952	R180-80-952
使用ピン型番				R08001-10	R08001-80

●寸法の詳細図は159~161ページを参照。